


HEX NUT
CLASS 10 METRIC

APPLICATION

Bremick® Hex Nuts Metric Class 10 are designed for industrial and construction applications where high tensile superior performance is required

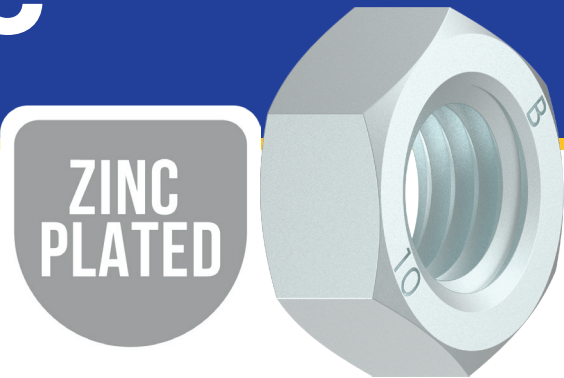

PRODUCT ATTRIBUTES

Material Class:	Carbon Steel Class 10 (Style 1, QT)
Thread Form:	Metric 6H
Finish:	Zinc Plated
Standard:	Complies to AS 1112.1:2015
Mechanical Properties:	Complies to ISO 898.2:2022
Chemical Composition:	Complies to ISO 898.2:2022

MARKING



In some cases, the Bremick marking will be replaced by the mark of the original manufacturer

MECHANICAL PROPERTIES

DIAMETER (mm)		M5	M6	M8	M10	M12	M14	M16	M18	M20	M24	M27	M30	M33	M36	M39
PROOF LOAD (N)	MIN	14800	20900	42500	67300	100300	136900	186800	230400	259700	423600	550800	673200	832800	980400	1171000
STRESS UNDER PROOF LOAD (MPa)	MIN	1040				1050			1070			1095				
HARDNESS	VICKERS (HV)	RANGE	272-353													


CHEMICAL COMPOSITION (%)

MATERIAL	C		Mn	P	S	TEMPERING TEMPERATURE °C
	MIN	MAX	MIN	MAX	MAX	MIN
CARBON STEEL	0.15	0.58	0.45	0.048	0.058	380

FINISH INFORMATION

ZINC PLATED		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Zinc Plating is a process of depositing a thin layer of zinc onto the surface of a steel object through electroplating. The steel object is then passivated with a transparent conversion layer.	Bremick® Zinc Plated Coating provides a low level of corrosion protection and is recommended for dry internal application. Bremick® Zinc Plating complies with AS1789.	Low.

DIMENSIONAL DATA (mm)



DIAMETER	PITCH (mm)	ACROSS FLATS (s)		ACROSS CORNERS (e)		NUT HEIGHT (m)	
		MIN	MAX	MIN		MIN	MAX
M3	0.50	5.32	5.50	6.01		2.15	2.40
M4	0.70	6.78	7.00	7.66		2.90	3.20
M5	0.80	7.78	8.00	8.79		4.40	4.70
M6	1.00	9.78	10.00	11.05		4.90	5.20
M8	1.25	12.73	13.00	14.38		6.44	6.80
M10	1.50	15.73	16.00	17.77		8.04	8.40
M12	1.75	17.73	18.00	20.03		10.37	10.80
M14	2.00	20.67	21.00	23.36		12.10	12.80
M16	2.00	23.67	24.00	26.75		14.10	14.80
M18	2.50	26.16	27.00	29.56		15.10	15.80
M20	2.50	29.16	30.00	32.95		16.90	18.00
M24	3.00	35.00	36.00	39.55		20.20	21.50
M27	3.00	40.00	41.00	45.20		22.50	23.80
M30	3.50	45.00	46.00	50.85		24.30	25.60
M33	3.50	49.00	50.00	55.37		27.40	28.70
M36	4.00	53.80	55.00	60.79		29.40	31.00
M39	4.00	58.80	60.00	66.44		31.80	33.40
M42	4.50	63.10	65.00	71.30		32.40	34.00
M48	5.00	73.10	75.00	82.60		36.40	38.00

SOCKET OR SPANNER SIZE (mm)

BOLT DIAMETER	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M24	M27	M30	M33	M36	M39	M42	M48
SPANNER SIZE	5.5	7	8	10	13	16	18	21	24	27	30	36	41	46	50	55	60	65	75