

FLAT ROUND WASHER METRIC



APPLICATION

Bremick® Bremick flat washers can be use used in a variety of applications and are generally used to distribute load force across a larger area or protect the surface of the item being damaged.

PRODUCT ATTRIBUTES

Material Class: Carbon Steel


Finish: Hot Dipped Galvanised

Standard: Complies to Bremick Specification

FINISH INFORMATION

HOT DIPPED GALVANISED		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Hot Dipped Galvanised is a process of dipping a steel object into a molten bath of zinc (455° - 480°C). The molten zinc adheres to the anchor surface covering all the corners and edges.	Bremick® Hot Dipped Galvanised Coating provides a moderate/high level of corrosion protection and is recommended for damp external application. Bremick® Hot Dipped Galvanising complies with AS/NZS 1214.	Moderate/High.

DIMENSIONAL DATA (mm)

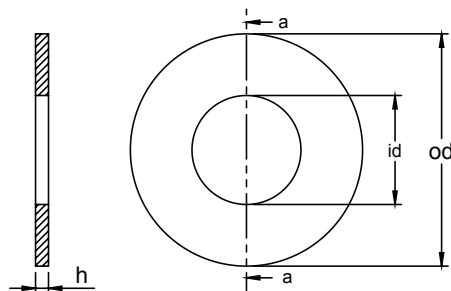

DIAMETER		INNER DIAMETER (id)		OUTER DIAMETER (od)			THICKNESS (h)		
NOMINAL		MIN	MAX	NOMINAL	MIN	MAX	NOM	MIN	MAX
M6		6.70	7.10	16.50	16.00	17.00	1.40	1.20	1.60
M8		8.80	9.30	19.50	19.00	20.00	1.60	1.40	1.80
M10		10.50	11.00	23.00	22.50	23.50	2.00	1.80	2.20
M10		10.50	10.77	27.00	26.48	27.00	2.00	1.80	2.20
M12		13.20	14.00	28.00	27.50	28.50	2.25	2.00	2.50
M12		13.00	13.27	32.00	31.48	32.00	2.25	2.00	2.50
M12		13.00	13.27	37.00	36.38	37.00	3.00	2.70	3.30
M16		17.20	18.00	34.00	33.50	34.50	2.75	2.50	3.00
M16		17.00	17.27	38.00	37.38	38.00	3.00	2.70	3.30
M16		17.00	17.27	50.00	49.38	50.00	4.00	3.40	4.60
M20		21.00	22.00	39.00	38.00	39.50	3.00	2.60	3.20
M20		21.00	21.33	45.00	44.38	45.00	3.00	2.70	3.30
M20		22.00	22.52	60.00	58.10	60.00	4.00	3.40	4.60
M24		26.00	27.00	53.00	52.00	54.20	4.00	3.50	4.20
M30		33.00	34.50	59.00	58.00	60.00	4.00	3.50	4.20
M36		39.00	40.50	72.00	70.00	73.00	5.00	4.50	5.20
M48		51.00	53.50	91.50	90.00	93.00	6.00	5.60	6.40

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au