


ENGINEERS WASHER METRIC

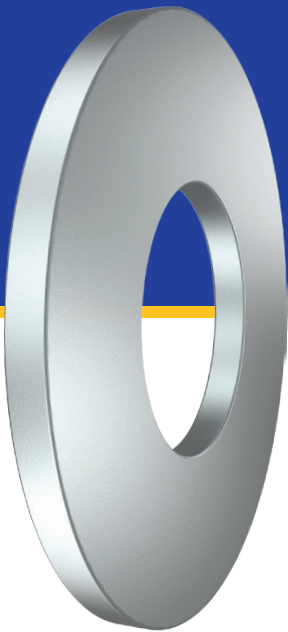

APPLICATION

Bremick® flat washers can be use used in a variety of applications and are generally used to distribute load force across a larger area or protect the surface of the item being secured.

PRODUCT ATTRIBUTES

Material Class: Carbon Steel


Finish: Zinc Plated

Standard: Complies to AS 1237.1:2015

FINISH INFORMATION

ZINC PLATED		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Zinc Plating is a process of depositing a thin layer of zinc onto the surface of a steel object through electroplating. The steel object is then passivated with a transparent conversion layer.	Bremick® Zinc Plated Coating provides a low level of corrosion protection and is recommended for dry internal application. Bremick® Zinc Plating complies with AS1789.	Low.

DIMENSIONAL DATA (mm)

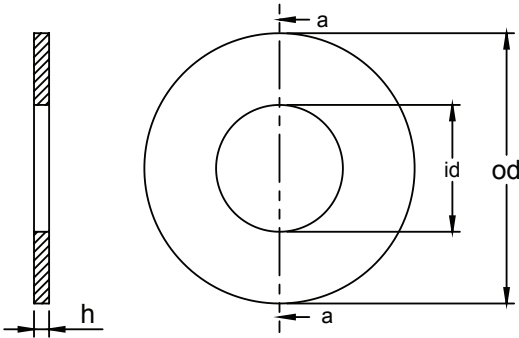

WASHER DIAMETER	INNER DIAMETER (id)		OUTER DIAMETER (od)			THICKNESS (h)		
NOMINAL	MIN	MAX	NOMINAL	MIN	MAX	NOM	MIN	MAX
M6	6.40	6.62	12.50	12.10	12.50	1.20	1.10	1.30
M8	8.40	8.70	17.00	16.50	17.00	1.20	1.10	1.30
M10	10.50	10.80	21.00	20.50	21.00	1.60	1.40	1.80
M12	13.00	13.30	24.00	23.50	24.00	1.60	1.40	1.80
M16	17.00	17.30	30.00	29.50	30.00	2.00	1.80	2.20
M20	21.00	21.30	37.00	36.50	37.00	2.00	1.80	2.20
M24	25.00	25.33	44.00	43.38	44.00	2.00	1.80	2.20

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au