


FLAT SQUARE WASHER METRIC

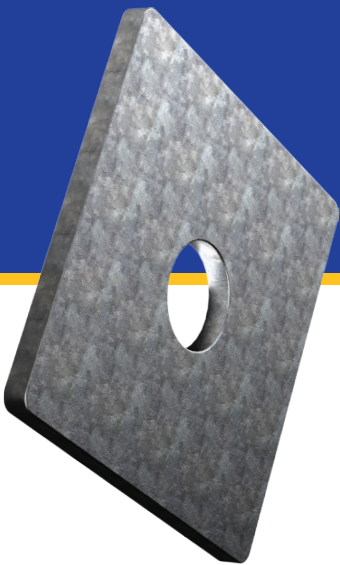

HOT DIPPED
GALVANISED

APPLICATION

Bremick® flat square washers can be used in a wide range of applications and are commonly installed to distribute load forces over a larger surface area, particularly on softer materials or slotted holes, helping to prevent surface damage and improve load bearing stability of the joint.

PRODUCT ATTRIBUTES

Material Class: Carbon Steel


Finish: Hot Dipped Galvanised

Standard: Complies to Bremick Specification

FINISH INFORMATION

HOT DIPPED GALVANISED		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Hot Dipped Galvanised is a process of dipping a steel object into a molten bath of zinc (455° - 480°C). The molten zinc adheres to the anchor surface covering all the corners and edges.	Bremick® Hot Dipped Galvanised Coating provides a moderate/high level of corrosion protection and is recommended for damp external application. Bremick® Hot Dipped Galvanising complies with AS/NZS 1214.	Moderate/High.

DIMENSIONAL DATA (mm)

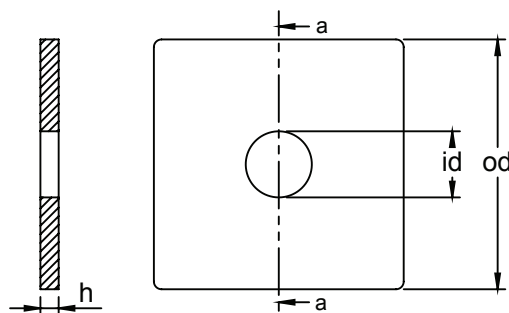

DIAMETER	INNER DIAMETER (id)		OUTER DIAMETER (od)			THICKNESS (h)		
NOMINAL	MIN	MAX	NOM	MIN	MAX	NOM	MIN	MAX
M8	8.4	8.7	40	39.0	40.0	3	2.7	3.3
M10	11.0	11.5	38	37.0	38.0	3	2.7	3.3
M10	11.0	11.5	40	39.0	40.0	3	2.7	3.3
M10	11.0	11.5	50	49.0	50.0	3	2.7	3.3
M12	13.0	13.5	40	39.0	40.0	3	2.7	3.3
M12	13.0	13.5	50	49.0	50.0	3	2.7	3.3
M12	13.0	13.5	50	49.0	50.0	5	4.7	5.3
M12	13.0	13.5	75	73.8	75.0	5	4.7	5.3
M16	17.0	17.5	50	49.0	50.0	3	2.7	3.3
M16	17.0	17.5	50	49.0	50.0	5	4.7	5.3
M16	17.0	17.5	50	49.0	50.0	6	5.7	6.3
M16	17.0	17.5	65	63.8	65.0	5	4.7	5.3
M16	17.0	17.5	65	63.8	65.0	6	5.7	6.3
M16	17.0	17.5	75	73.8	75.0	5	4.7	5.3
M16	17.0	17.5	75	73.8	75.0	6	5.7	6.3
M20	21.0	22.0	50	49.0	50.0	3	2.7	3.3
M20	21.0	22.0	50	49.0	50.0	5	4.7	5.3
M20	21.0	22.0	50	49.0	50.0	6	5.7	6.3
M20	21.0	22.0	65	63.8	65.0	5	4.7	5.3
M20	21.0	22.0	65	63.8	65.0	6	5.7	6.3
M20	21.0	22.0	75	73.8	75.0	5	4.7	5.3
M20	21.0	22.0	75	73.8	75.0	6	5.7	6.3
M20	21.0	22.0	75	73.8	75.0	8	7.5	8.5
M20	21.0	22.0	75	73.8	75.0	10	9.5	10.5
M20	21.0	22.0	100	98.0	100.0	6	5.7	6.3
M24	25.0	26.0	65	63.8	65.0	5	4.7	5.3
M24	25.0	26.0	75	73.8	75.0	5	4.7	5.3
M24	25.0	26.0	75	73.8	75.0	6	5.7	6.3
M24	25.0	26.0	75	73.8	75.0	10	9.5	10.5
M24	25.0	26.0	100	98.0	100.0	6	5.7	6.3
M24	25.0	26.0	100	98.0	100.0	8	7.5	8.5
M24	25.0	26.0	100	98.0	100.0	10	9.5	10.5
M24	25.0	26.0	100	98.0	100.0	12	11.5	12.5
M30	31.0	32.0	75	73.8	75.0	5	4.7	5.3
M30	31.0	32.0	100	98.0	100.0	10	9.5	10.5

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au