


FLAT SQUARE WASHER METRIC STAINLESS STEEL

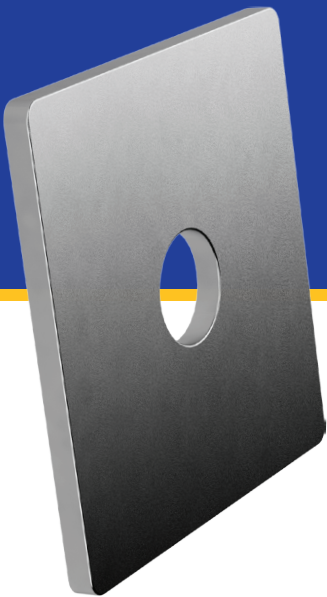

APPLICATION

Bremick® flat square washers can be used in a wide range of applications and are commonly installed to distribute load forces over a larger surface area, particularly on softer materials or slotted holes, helping to prevent surface damage and improve load bearing stability of the joint.

PRODUCT ATTRIBUTES


Material Class: Stainless Steel 316

Standard: Complies to Bremick Specification

FINISH INFORMATION

STAINLESS STEEL 316		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
316 is a Marine Grade SS – It contains 2-3% Molybdenum which provides highest possible corrosion protection than 304 Stainless steel.	Bremick® 316 Stainless Steel provides the ultimate level of protection and is recommended for external application and marine environments.	Ultimate

DIMENSIONAL DATA (mm)

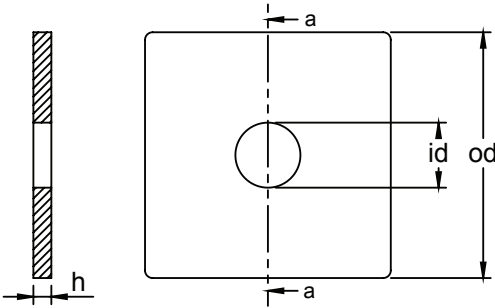

DIAMETER		INNER DIAMETER (id)		OUTER DIAMETER (od)			THICKNESS (h)		
NOMINAL		MIN	MAX	NOMINAL	MIN	MAX	NOM	MIN	MAX
M12		13.50	13.93	50.00	49.00	50.50	3.00	2.70	3.30
M16		17.00	17.50	50.00	50.00	50.50	5.00	5.00	5.50
M20		22.00	22.84	50.00	48.40	50.00	5.00	4.00	6.00
M24		26.00	26.84	75.00	73.10	75.00	6.00	5.90	6.10

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au