


NYLON INSERT LOCK NUT
UNC
STAINLESS STEEL



APPLICATION

Bremick® nylon insert nuts are used in a wide range of applications to reduce loosening due to vibration and other factors. The nylon thread is cut upon application and produced friction. Not recommended for repeat use

PRODUCT ATTRIBUTES

Material Class: Stainless Steel 304

Thread Form: Class 2B

Standard: Complies to ASME B18.16.6:2017

Chemical Composition: Complies to EN 10088-1:2023


MATERIAL INFORMATION (%)

STAINLESS STEEL GRADE	C	Si	Mn	P	S	Cr	Ni	N
	MAX	MAX	MAX	MAX	MAX	RANGE	RANGE	MAX
304	0.07	1.00	2.00	0.045	0.015	17.5-19.5	8.00-10.5	0.10

MATERIAL INFORMATION

STAINLESS STEEL 304		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
304 is the most commonly used stainless steel. It is an austenitic, offers excellent strength and corrosion resistance.	Bremick® 304 Stainless Steel provides an extreme level of protection and is recommended for wet external application. Bremick® 304 Stainless Steel is an austenitic stainless steel that offers all round performance.	Extreme

DIMENSIONAL DATA (inches)

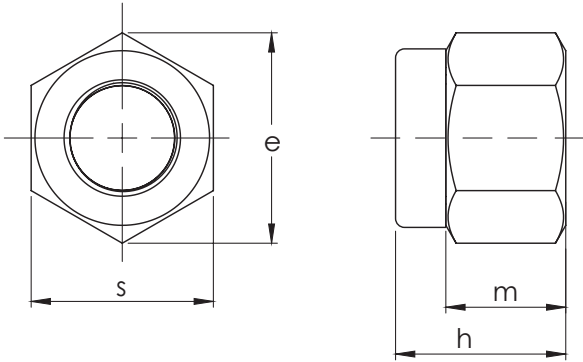

DIAMETER (inches)	ACROSS FLATS (s)		ACROSS CORNERS (e)	TOTAL HEIGHT (h)		NUT HEIGHT (m)
	MIN	MAX	MIN	MIN	MAX	MIN
#10	0.367	0.376	0.410	0.229	0.249	0.140

SOCKET OR SPANNER SIZE (inches)

BOLT DIAMETER	#10
SPANNER SIZE	0.376

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.

The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
 Head Office | 88 Dalmeny Avenue, Rosebery 2018
 National Distribution Centre | M5/M7 Logistics Park,
 Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au