


CUP WASHER METRIC STAINLESS STEEL

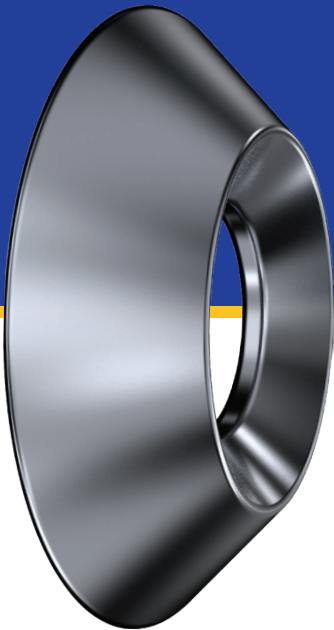

APPLICATION

Bremick® cup washers are used to distribute load and provide a neat, supportive seat for fastener heads, helping to protect the surface and improve load stability in the joint.

PRODUCT ATTRIBUTES


Material Class: Stainless Steel 304

Standard: Complies to Bremick Specification

MATERIAL INFORMATION

STAINLESS STEEL 304		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
304 is the most commonly used stainless steel. It is an austenitic, offers excellent strength and corrosion resistance.	Bremick® 304 Stainless Steel provides an extreme level of protection and is recommended for wet external application. Bremick® 304 Stainless Steel is an austenitic stainless steel that offers all round performance.	Extreme

DIMENSIONAL DATA (inches)

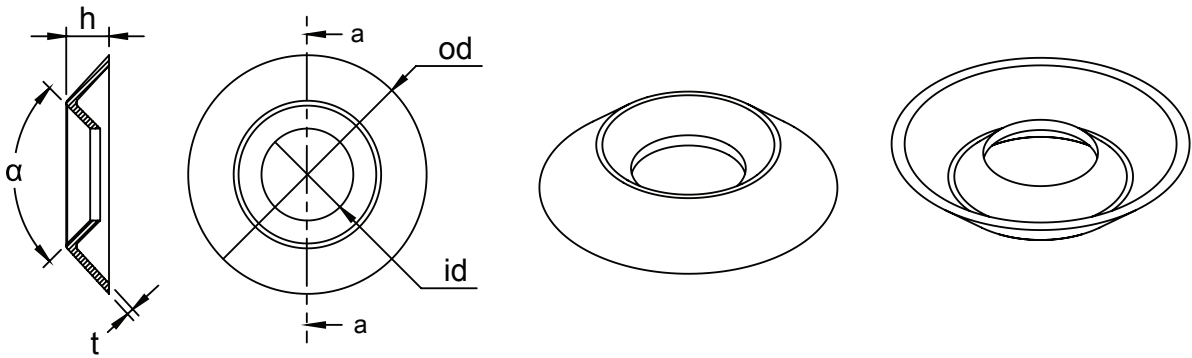

DIAMETER	INNER DIAMETER (id)		OUTER DIAMETER (od)		THICKNESS (t)	
NOMINAL	MIN	MAX	MIN	MAX	MIN	MAX
6G	0.1610	0.1850	0.4252	0.4480	0.0780	0.1020
8G	0.1961	0.2201	0.4882	0.5272	0.0858	0.1142
10G	0.2358	0.2591	0.5819	0.6059	0.1059	0.1260
12G	0.2669	0.3071	0.6689	0.6921	0.1260	0.1488

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au