

FLAT ROUND WASHER IMPERIAL



HOT DIPPED
GALVANISED

APPLICATION

Bremick® flat washers can be use used in a variety of applications and are generally used to distribute load force across a larger area or protect the surface of the item being secured.

PRODUCT ATTRIBUTES

Material Class: Carbon Steel


Finish: Hot Dipped Galvanised

Standard: Complies to Bremick Specification

FINISH INFORMATION

HOT DIPPED GALVANISED		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Hot Dipped Galvanised is a process of dipping a steel object into a molten bath of zinc (455° - 480°C). The molten zinc adheres to the anchor surface covering all the corners and edges.	Bremick® Hot Dipped Galvanised Coating provides a moderate/high level of corrosion protection and is recommended for damp external application. Bremick® Hot Dipped Galvanising complies with AS/NZS 1214.	Moderate/High.

DIMENSIONAL DATA (Inches)

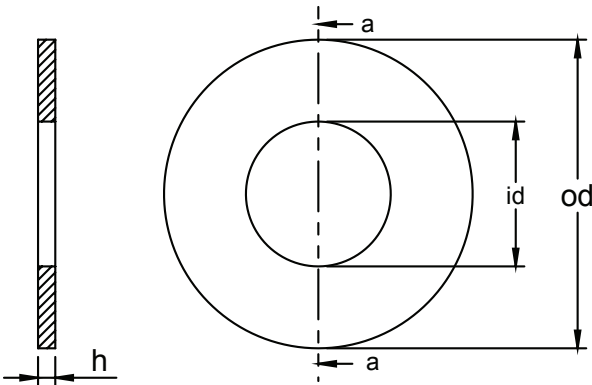

DIAMETER	INNER DIAMETER (id)		OUTER DIAMETER (od)			THICKNESS (h)		
	NOMINAL	MIN	MAX	MIN	MAX	NOM	MIN	MAX
7/8		0.9252	0.9646	1.8307	1.8898	0.1181	0.1102	0.1378
1-1/8		1.2205	1.2795	2.4409	2.5197	0.1575	0.1378	0.1654
1-1/4		1.3780	1.4370	2.4803	2.5984	0.1575	0.1378	0.1654

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au