


FLAT ROUND WASHER IMPERIAL

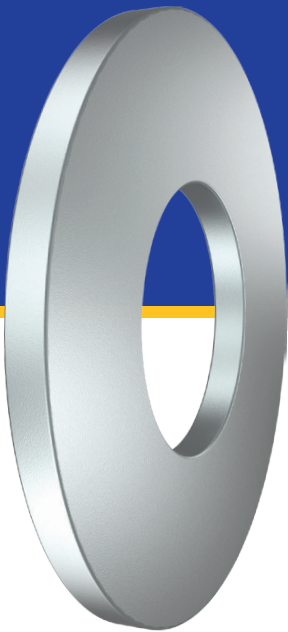

APPLICATION

Bremick® flat washers can be use used in a variety of application and are generally used to distribute load force across a larger area or protect the surface of the item being secured.

PLAIN

PRODUCT ATTRIBUTES

Material Class: Carbon Steel


Finish: Plain/Black/Natural

Standard: Complies to Bremick Specification

FINISH INFORMATION

PLAIN / BLACK / NATURAL		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Plain, Black & Natural are all terms referring to the fastener not having a coating applied. The product has a light oil added.	Plain or uncoated fasteners offer no corrosion protection they are supplied lightly oiled to inhibit the rust process prior to installation and help during installation.	—

DIMENSIONAL DATA (Inches)

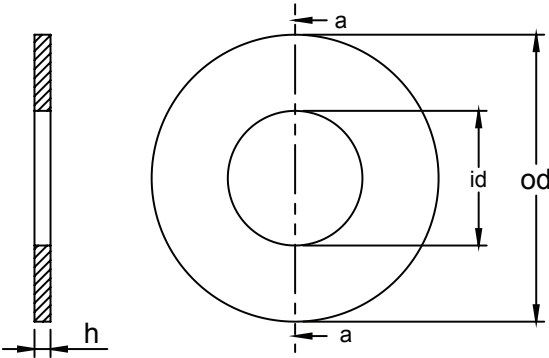

DIAMETER	INNER DIAMETER (id)		OUTER DIAMETER (od)			THICKNESS (h)		
NOMINAL	MIN	MAX	NOM	MIN	MAX	NOM	MIN	MAX
7/16	0.4724	0.5000	1	1.0000	1.0433	0.0787	0.0709	0.0866
7/8	0.9252	0.9646	1-7/8	1.8307	1.8898	0.1181	0.1102	0.1378
1-1/8	1.2205	1.2795	2-1/2	2.4409	2.5197	0.1575	0.1378	0.1654
1-1/4	1.3780	1.4370	2-1/2	2.4803	2.5984	0.1575	0.1378	0.1654
1-1/2	1.6142	1.6929	3	3.0315	3.1496	0.1969	0.1890	0.2165
2	2.1260	2.1654	4	3.9370	4.1339	0.2362	0.2205	0.2520

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au