


FLAT ROUND WASHER IMPERIAL

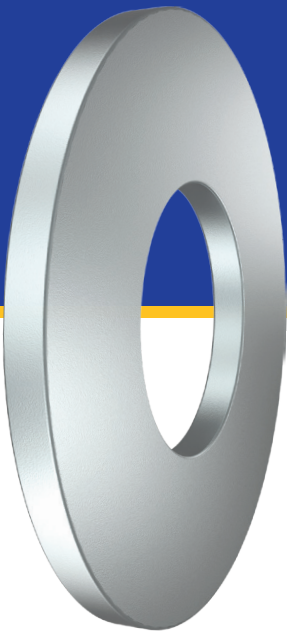

APPLICATION

Bremick® flat washers can be use used in a variety of applications and are generally used to distribute load force across a larger area or protect the surface of the item being secured.

PRODUCT ATTRIBUTES

Material Class: Carbon Steel


Finish: Zinc Plated

Standard: Complies to Bremick Specification

FINISH INFORMATION

ZINC PLATED		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Zinc Plating is a process of depositing a thin layer of zinc onto the surface of a steel object through electroplating. The steel object is then passivated with a transparent conversion layer.	Bremick® Zinc Plated Coating provides a low level of corrosion protection and is recommended for dry internal application. Bremick® Zinc Plating complies with AS1789.	Low.

DIMENSIONAL DATA (inches)

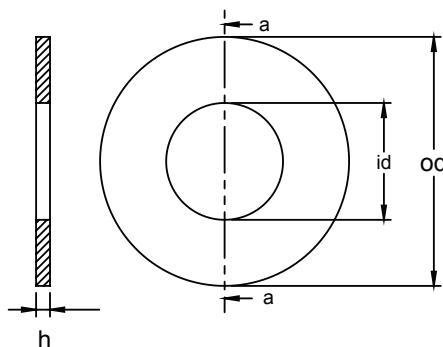

DIAMETER	INNER DIAMETER (id)		OUTER DIAMETER (od)			THICKNESS (h)		
NOMINAL	MIN	MAX	NOMINAL	MIN	MAX	NOM	MIN	MAX
3/16	0.2087	0.2157	1/2	0.4921	0.5079	0.0350 (20G)	0.0354	0.0394
3/16	0.2087	0.2157	3/4	0.7421	0.7579	0.0625 (16G)	0.0571	0.0650
3/16	0.2087	0.2157	1	0.9921	1.0079	0.0625 (16G)	0.0571	0.0650
3/16	0.2087	0.2157	1 1/4	1.2421	1.2579	0.0625 (16G)	0.0571	0.0650
1/4	0.2657	0.2736	5/8	0.6173	0.6331	0.0495 (18G)	0.0433	0.0512
1/4	0.2657	0.2736	3/4	0.7421	0.7579	0.0495 (18G)	0.0433	0.0512
1/4	0.2657	0.2736	3/4	0.7421	0.7579	0.0625 (16G)	0.0571	0.0650
1/4	0.2657	0.2736	7/8	0.8673	0.8831	0.0495 (18G)	0.0433	0.0512
1/4	0.2657	0.2736	1	0.9921	1.0079	0.0625 (16G)	0.0571	0.0650
1/4	0.2657	0.2736	1 1/4	1.2421	1.2579	0.0625 (16G)	0.0571	0.0650
1/4	0.2657	0.2736	1 1/2	1.4921	1.5079	0.0625 (16G)	0.0571	0.0650
1/4	0.2657	0.2736	2	1.9921	2.0079	0.0625 (16G)	0.0571	0.0650
5/16	0.3307	0.3394	3/4	0.7421	0.7579	0.0495 (18G)	0.0433	0.0512
5/16	0.3307	0.3394	3/4	0.7421	0.7579	0.0625 (16G)	0.0571	0.0650
5/16	0.3307	0.3394	7/8	0.8673	0.8831	0.0495 (18G)	0.0433	0.0512
5/16	0.3307	0.3394	1	0.9921	1.0079	0.0625 (16G)	0.0571	0.0650
5/16	0.3307	0.3394	1 1/4	1.2421	1.2579	0.0625 (16G)	0.0571	0.0650
5/16	0.3307	0.3394	1 1/2	1.4921	1.5079	0.0625 (16G)	0.0571	0.0650
5/16	0.3307	0.3394	2	1.9921	2.0079	0.0625 (16G)	0.0571	0.0650
3/8	0.4134	0.4240	3/4	0.7421	0.7579	0.0625 (16G)	0.0571	0.0650
3/8	0.4134	0.4240	7/8	0.8673	0.8831	0.0625 (16G)	0.0571	0.0650
3/8	0.4134	0.4240	1	0.9921	1.0079	0.0625 (16G)	0.0571	0.0650
3/8	0.4134	0.4240	1 1/4	1.2421	1.2579	0.0625 (16G)	0.0571	0.0650
3/8	0.4134	0.4240	1 1/2	1.4921	1.5079	0.0625 (16G)	0.0571	0.0650
3/8	0.4134	0.4240	2	1.9921	2.0079	0.0625 (16G)	0.0571	0.0650
3/8	0.4134	0.4240	2	1.9921	2.0079	0.0991 (12G)	0.0906	0.0984
7/16	0.4331	0.4437	1	0.9921	1.0079	0.0625 (16G)	0.0571	0.0650
1/2	0.5118	0.5224	1	0.9921	1.0079	0.0625 (16G)	0.0571	0.0650
1/2	0.5118	0.5224	1 1/8	1.1173	1.1331	0.0625 (16G)	0.0571	0.0650
1/2	0.5118	0.5224	1 1/4	1.2421	1.2579	0.0625 (16G)	0.0571	0.0650
1/2	0.5118	0.5224	1 1/2	1.4921	1.5079	0.0785 (14G)	0.0709	0.0827
1/2	0.5118	0.5224	2	1.9921	2.0079	0.0991 (12G)	0.0906	0.0984
5/8	0.6693	0.6799	2	1.9921	2.0079	0.0991 (12G)	0.0906	0.0984
3/4	0.8268	0.8398	1 1/2	1.4921	1.5079	0.0785 (14G)	0.0709	0.0827
1	1.0630	1.0760	1 7/8	1.8673	1.8831	0.0785 (14G)	0.0709	0.0827

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au