

EXTERNAL TOOTH LOCK WASHER IMPERIAL



APPLICATION

Bremick® external tooth lock washers bite into the mating surfaces to resist rotation, helping prevent fasteners from loosening under vibration and dynamic loads.

PRODUCT ATTRIBUTES

Material Class: Carbon Steel


Finish: Zinc Plated

Standard: Complies to ASME B18.21.1:2009

FINISH INFORMATION

ZINC PLATED		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Zinc Plating is a process of depositing a thin layer of zinc onto the surface of a steel object through electroplating. The steel object is then passivated with a transparent conversion layer.	Bremick® Zinc Plated Coating provides a low level of corrosion protection and is recommended for dry internal application. Bremick® Zinc Plating complies with AS1789.	Low.

DIMENSIONAL DATA (inches)

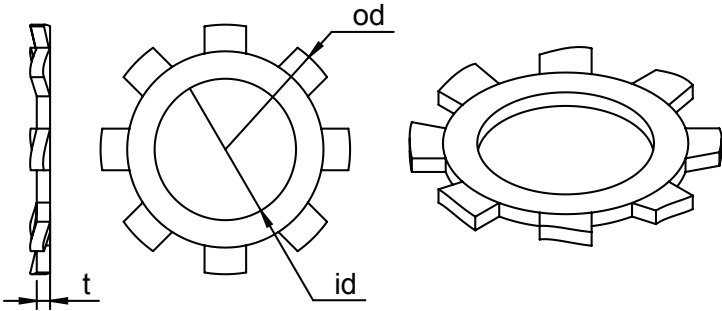

BOLT DIAMETER	INNER DIAMETER (id)		OUTER DIAMETER (od)		THICKNESS (t)	
NOMINAL	MIN	MAX	MIN	MAX	MIN	MAX
5/32	0.168	0.176	0.365	0.381	0.018	0.023
3/16	0.195	0.204	0.395	0.410	0.018	0.024
1/4	0.256	0.267	0.494	0.510	0.023	0.028
5/16	0.320	0.332	0.588	0.610	0.028	0.034
3/8	0.384	0.398	0.670	0.694	0.032	0.040
1/2	0.513	0.530	0.880	0.900	0.037	0.045

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au