

INTERNAL TOOTH LOCK WASHER IMPERIAL



APPLICATION

Bremick® internal tooth lock washers grip the underside of the fastener head and the mating surface to resist loosening, providing reliable locking performance in applications subject to vibration.

PRODUCT ATTRIBUTES

Material Class: Carbon Steel


Finish: Zinc Plated

Standard: Complies to ASME B18.21.1:2009

FINISH INFORMATION

ZINC PLATED		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
Zinc Plating is a process of depositing a thin layer of zinc onto the surface of a steel object through electroplating. The steel object is then passivated with a transparent conversion layer.	Bremick® Zinc Plated Coating provides a low level of corrosion protection and is recommended for dry internal application. Bremick® Zinc Plating complies with AS1789.	Low.

DIMENSIONAL DATA (inches)

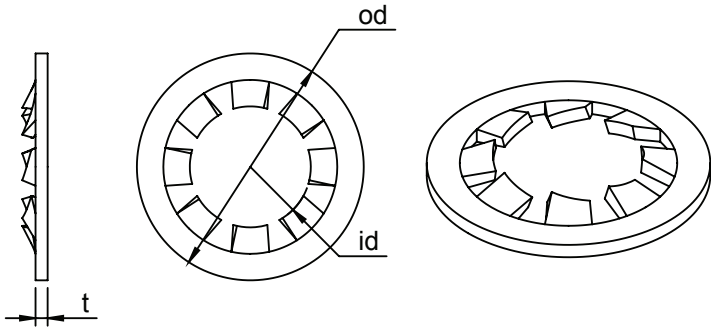

BOLT DIAMETER	INNER DIAMETER (id)		OUTER DIAMETER (od)		THICKNESS (t)	
NOMINAL	MIN	MAX	MIN	MAX	MIN	MAX
1/8	0.129	0.136	0.255	0.280	0.014	0.020
5/32	0.168	0.176	0.325	0.340	0.018	0.023
3/16	0.195	0.204	0.365	0.381	0.018	0.024
1/4	0.256	0.267	0.460	0.478	0.023	0.028
5/16	0.320	0.332	0.594	0.610	0.028	0.034
3/8	0.384	0.398	0.670	0.692	0.032	0.040
1/2	0.512	0.530	0.867	0.900	0.037	0.045
1	1.019	1.060	1.590	1.637	0.059	0.067

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au