


SELF TAPPING SCREW PAN SQUARE STAINLESS STEEL

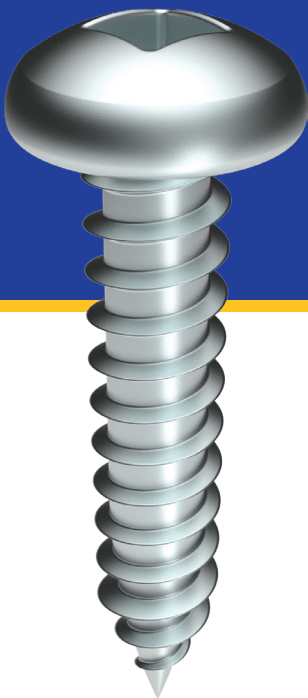

APPLICATION

Bremick® Self tapping screws are used in a variety of applications where there is a need for the screw to cut its own thread, usually in softer material like wood and plastic. The panhead protrudes above the surface eliminating the need for countersinking.

PRODUCT ATTRIBUTES

Material Class: Stainless Steel 304


Thread Form: Type AB

Standard: Complies to ASME B18.6.4:1998

MATERIAL INFORMATION

STAINLESS STEEL 304		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
304 is the most commonly used stainless steel. It is an austenitic, offers excellent strength and corrosion resistance.	Bremick® 304 Stainless Steel provides an extreme level of protection and is recommended for wet external application. Bremick® 304 Stainless Steel is an austenitic stainless steel that offers all round performance.	Extreme

DIMENSIONAL DATA (inches)

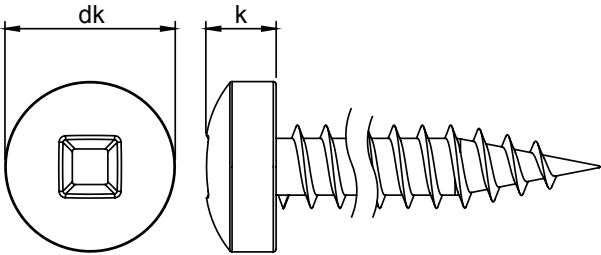

DIAMETER NOMINAL	BASIC SCREW DIAMETER	HEAD DIAMETER (dk)		HEAD HEIGHT (k)	
		MIN	MAX	MIN	MAX
6#	0.1380	0.256	0.270	0.087	0.097
8#	0.1640	0.306	0.322	0.105	0.115
10#	0.1900	0.357	0.373	0.122	0.133

DRIVER SIZE (inches)

SCREW DIAMETER	6#	8#	10#
SQUARE DRIVE SIZE	1R	2R	2R

Note: Reference ASME B18.6.3 for Driver Size