


SELF TAPPING SCREW PAN PHILIPS STAINLESS STEEL

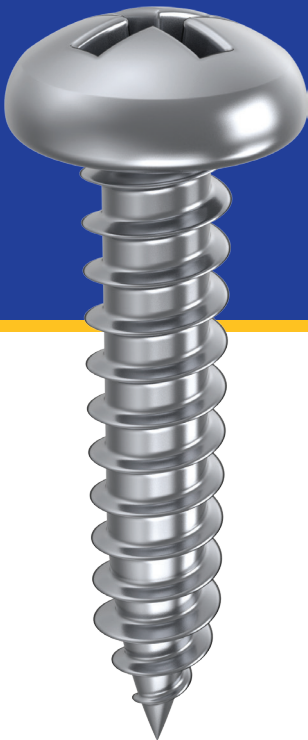

APPLICATION

Bremick® Self tapping screws are used in a variety of applications where there is a need for the screw to cut its own thread, usually in softer material like wood and plastic. The panhead protrudes above the surface eliminating the need for countersinking.

PRODUCT ATTRIBUTES

Material Class: Stainless Steel 304


Thread Form: Type AB

Standard: Complies to ASME B18.6.4:1998

MATERIAL INFORMATION

STAINLESS STEEL 304		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
304 is the most commonly used stainless steel. It is an austenitic, offers excellent strength and corrosion resistance.	Bremick® 304 Stainless Steel provides an extreme level of protection and is recommended for wet external application. Bremick® 304 Stainless Steel is an austenitic stainless steel that offers all round performance.	Extreme

DIMENSIONAL DATA (inches)

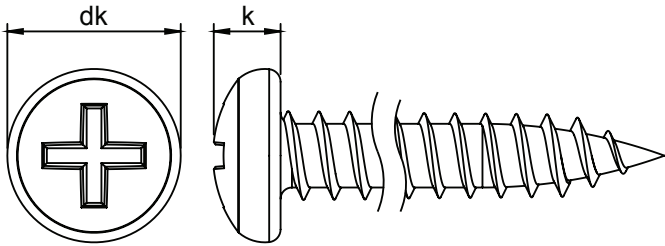

DIAMETER NOMINAL	BASIC SCREW DIAMETER	HEAD DIAMETER (dk)		HEAD HEIGHT (k)	
		MIN	MAX	MIN	MAX
0#	0.0600	0.104	0.116	0.036	0.044
1#	0.0730	0.130	0.142	0.044	0.053
2#	0.0860	0.155	0.167	0.053	0.062
3#	0.0990	0.180	0.193	0.062	0.071
4#	0.1120	0.205	0.219	0.070	0.080
5#	0.1250	0.231	0.245	0.079	0.089
6#	0.1380	0.256	0.270	0.087	0.097
7#	0.1510	0.281	0.296	0.096	0.106
8#	0.1640	0.306	0.322	0.105	0.115
10#	0.1900	0.357	0.373	0.122	0.133
12#	0.2160	0.407	0.425	0.139	0.151
14#	0.2420	0.457	0.476	0.156	0.169

DRIVER SIZE (inches)

SCREW DIAMETER	0#	1#	2#	3#	4#	5#	6#	7#	8#	10#	12#	14#
SQUARE DRIVE SIZE	0	0	1	1	1	2	2	2	2	2	3	3

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.
The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
Head Office | 88 Dalmeny Avenue, Rosebery 2018
National Distribution Centre | M5/M7 Logistics Park,
Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au