

U DRIVE SCREW IMPERIAL STAINLESS STEEL



APPLICATION

Bremick® U-drive screws are hammered into a predrilled hole to create a permanent connection between hard materials like steel. Used in a variety of applications they are perfect for securing signs and inspection plates where you do not want them to be easily removed.

PRODUCT ATTRIBUTES

Material Class: Stainless Steel 304


Thread Form: Type U

Standard: Complies to ASME B18.6.4:1998

MATERIAL INFORMATION

STAINLESS STEEL 304		
DESCRIPTION	OVERVIEW	CORROSION RESISTANCE
304 is the most commonly used stainless steel. It is an austenitic, offers excellent strength and corrosion resistance.	Bremick® 304 Stainless Steel provides an extreme level of protection and is recommended for wet external application. Bremick® 304 Stainless Steel is an austenitic stainless steel that offers all round performance.	Extreme

DIMENSIONAL DATA (inches)

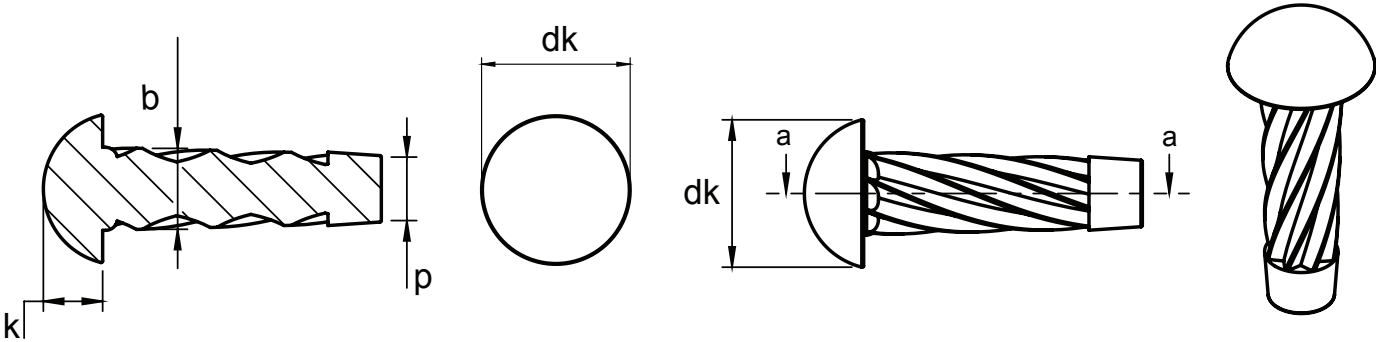

SIZE NOMINAL	BASIC SCREW DIAMETER	OUTSIDE DIAMETER (d)		HEAD DIAMETER (dk)		HEAD HEIGHT (k)		PILOT DIAMETER (p)	
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
4#	0.1160	0.112	0.116	0.193	0.211	0.075	0.086	0.092	0.096
6#	0.1400	0.136	0.140	0.240	0.260	0.091	0.103	0.112	0.116

DRIVER SIZE (inches)

SCREW DIAMETER	4#	6#
DRILL SIZE	37	31

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application.

The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.

Bremick Pty Ltd
 Head Office | 88 Dalmeny Avenue, Rosebery 2018
 National Distribution Centre | M5/M7 Logistics Park,
 Warehouse 4B, 290 Kurrajong Road, Prestons NSW 2170
www.bremick.com.au