

LIGHT DUTY FIXINGS


Plasterboard Plug

Suits 6g & 8g screws

Zinc Alloy or Nylon
Dry, internal applications

FEATURES & BENEFITS

- Light duty applications.
- Ideal for gypsum plasterboard, 10mm - 20mm thick.
- Fully removable if required.
- Single piece anchor body.
- Use PH2 screwdriver / bit to set anchor & screw.

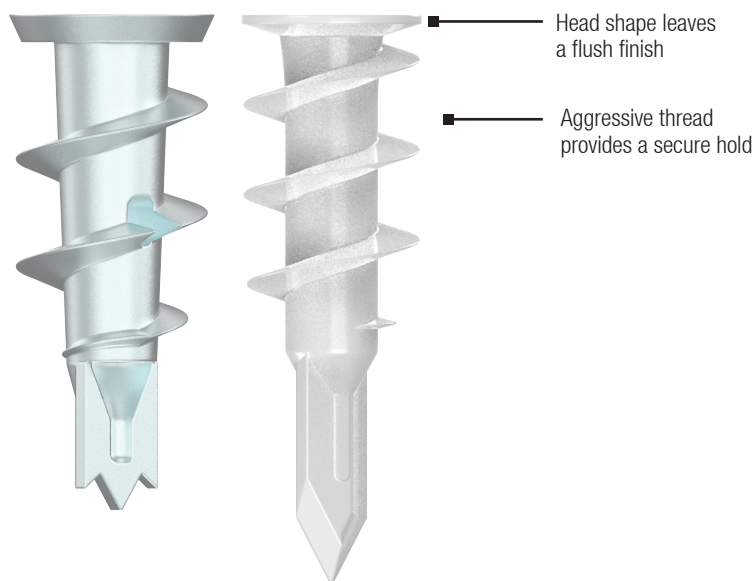


APPLICATIONS/TRADES

- Light duty fixings
- Picture hooks

**ZINC
PLATED**

SUBSTRATE SUITABILITY



PLASTERBOARD


Compatible to use with
Bremick Utility Hook
HHUM050002



PLASTERBOARD PLUG

LIGHT DUTY FIXINGS

RANGE

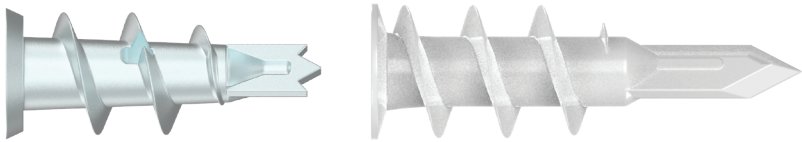


PLASTERBOARD PLUG

Product Code	Pack Qty	Body material	Anchor length (mm)	Suits screw gauges*	Phillips driver bit size	Maximum load in any direction** (kg)
PBAMZ#80002	100	Zinc Alloy	31	6g - 8g	PH2	5
PBAMN#80002	100	Nylon	41			

Note: * Minimum screw length = Anchor length + fixture thickness + 5mm
 ** For gypsum plasterboard 10mm thickness.

INSTALLATION

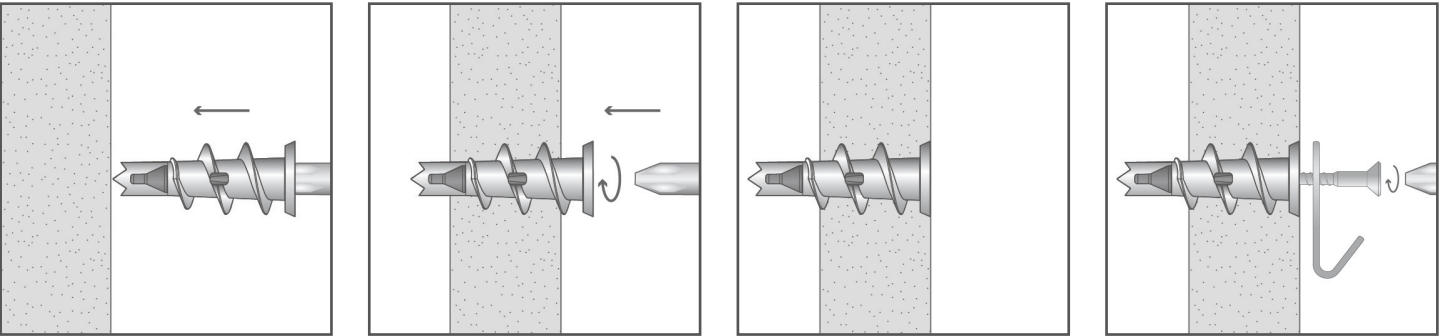

Pierce plasterboard with plug.

Screw plug in while applying forward pressure.

Plug is installed once flange is flush with plasterboard surface.

Pass screw through fixture then install screw into plug.

Whilst every care was taken in the preparation of this publication, Bremick® accepts no responsibility for the accuracy of the information supplied. Bremick® reserves the right to make alterations to specifications as part of ongoing development and improvement. This publication serves as a guide and it's the responsibility of the end user to ensure suitability for their application. The contents of this publication are the exclusive copyright of Bremick® and may not be reproduced without permission.