

LIGHT DUTY FIXINGS


SPRING TOGGLE

M5 sizes

Zinc Plated
Dry, internal applications

FEATURES & BENEFITS

- Light duty applications
- Ideal for plasterboard, masonite & other thin panel applications
- Fully removable if required (toggle body will remain in wall cavity)
- Suitable for single use only

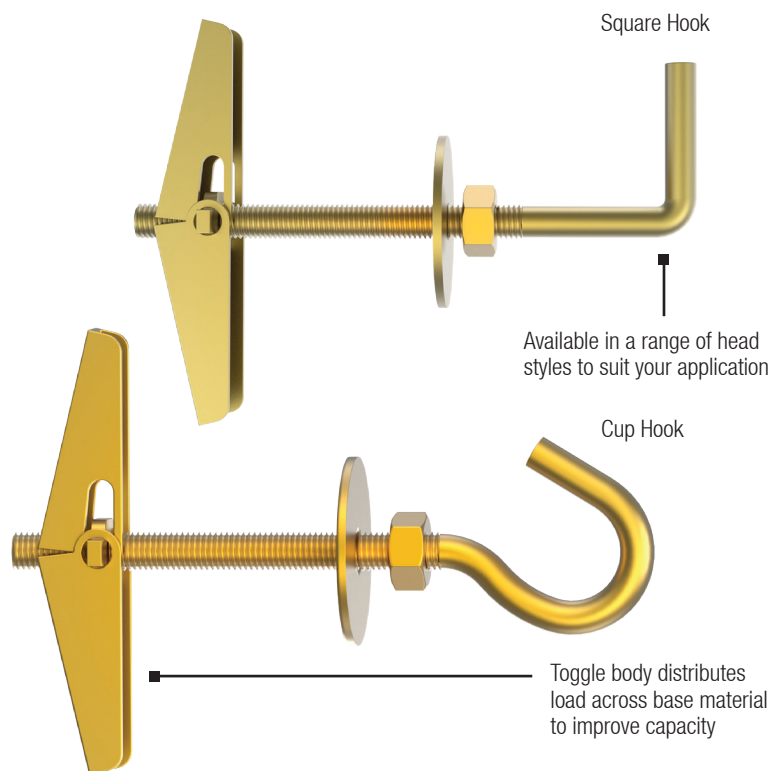


APPLICATIONS/TRADES


Light duty fastenings into plasterboard and thin base materials with cavity behind

**ZINC
YELLOW**

SUBSTRATE SUITABILITY




PLASTERBOARD



THIN PANEL /
WALL BOARDS

SPRING TOGGLE

LIGHT DUTY FIXINGS

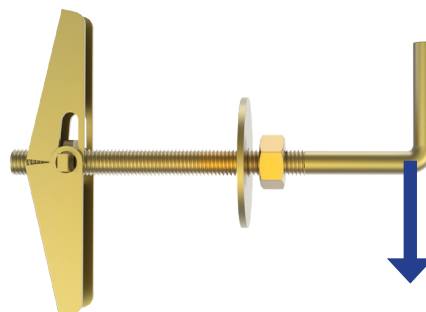


RANGE

SQUARE HOOK - horizontal install into wall only

Product Code	Pack Qty	Thread size	Anchor length (mm)	Drill hole Ø (mm)	Maximum fixture thickness* (mm)	Fixture clearance hole Ø (mm)	Philips Driver Bit Size	Maximum load in direction shown** (kg)
			l_t	d_o	$t_{fix, max}$	d_f		
TSHMZ050502	50	M5	50	14	10	6	PH2	12

Note: * For walling thicker than 10mm, reduce the maximum fixture thickness accordingly.
 ** For plasterboard minimum 10mm thickness.

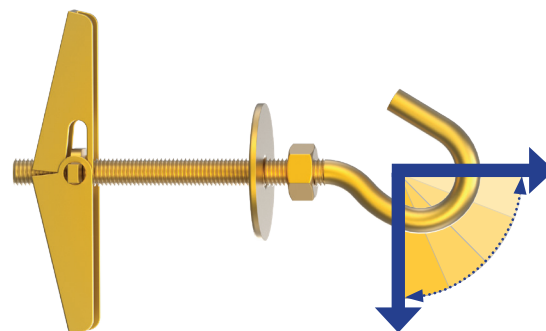

RANGE

CUP HOOK - can be installed horizontally or vertically


Product Code	Pack Qty	Thread size	Anchor length (mm)	Drill hole Ø (mm)	Maximum fixture thickness* (mm)	Fixture clearance hole Ø (mm)	Philips Driver Bit Size	Maximum load in direction shown** (kg)
			l_t	d_o	$t_{fix, max}$	d_f		
TCHMZ050502	50	M5	50	14	10	6	PH2	12

Note: * For walling thicker than 10mm, reduce the maximum fixture thickness accordingly.
 ** For plasterboard minimum 10mm thickness.


SPRING TOGGLE

LIGHT DUTY FIXINGS


INSTALLATION

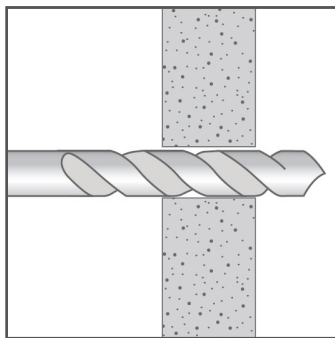

Drill hole through base material at the specified diameter.

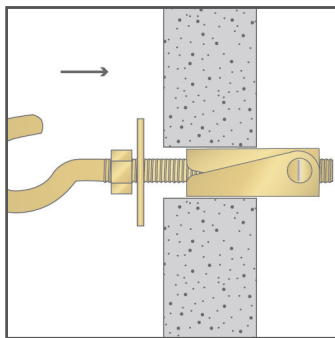

Push toggle body through base material until toggle 'snaps' open.

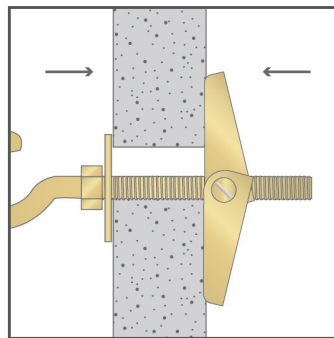

Tighten screw until toggle clamps base material from behind. Take care not to over tighten.