

Strap Nail

GALVANISED

Application

The Bremick® Strap Nails are a nailplate with pre-punched nails that are used in connecting timber wall frame units.

Advantages

The Bremick® Strap Nail provides numerous benefits including:

- **Quick & Easy Wall Frame Construction:** Used to quickly join constructed wall frame units together
- **Prevents Timber Splitting:** The product design spaces the pre-punched nails towards the end of the nailplate, this prevents the timber being split when connecting wall frame units
- **Pre-Punched Nails:** The twisted pre-punched nail design ensures that it easily fixed to form a timber connection that resists nail withdrawal
- **Sharp Nail Tooth:** Easily penetrates both hard and softwoods


Specifications

Steel Grade	G300
Coating	Z275 – Galvanised
Thickness	1.0mm
Width	50mm
Length	100mm




Bremick® Ranging

Product Code	Dimensions
TSNG050100104	50mm x 100mm x 1.0mm
Coating	Pack Qty
Z275 – Galvanised	75

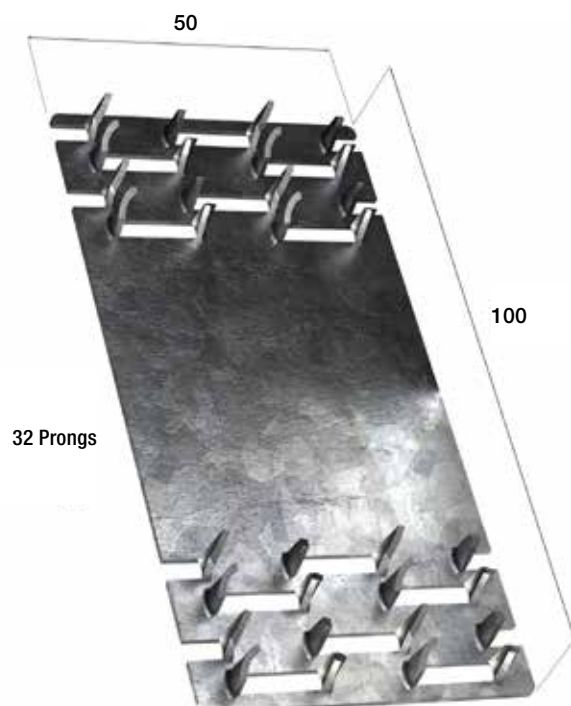


Installation Instructions

1

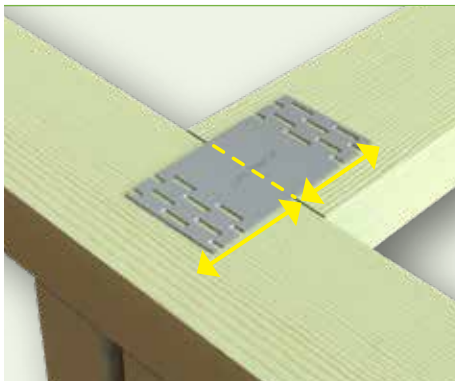

Locate the Bremick® Strap Nail into position. For butt joining, ensure an equal length on both sides of the joint.


2

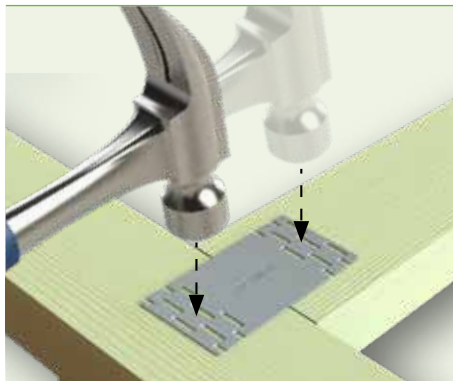


Install the Strap Nail by hammering on the top of the nailplate, focusing on the pre-punched nails, and ensure the plate is flush against the timber.

Arrange suitable to required areas


Intersection of Top Plates

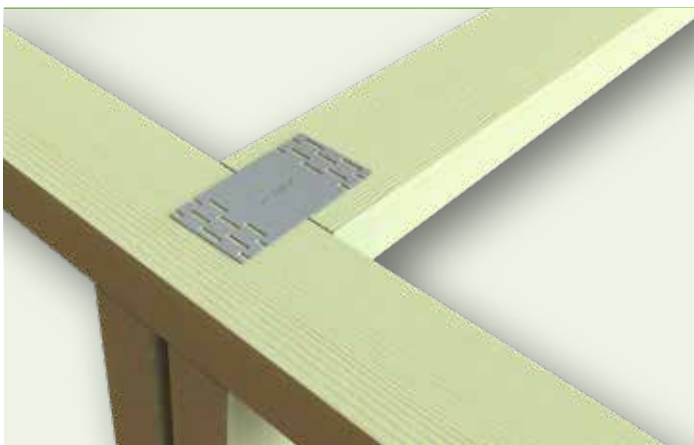

Top Plate Corner Connection

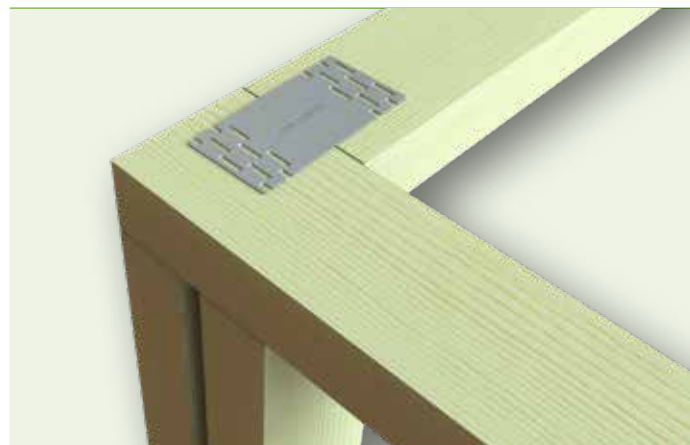

Top Plate Butt Joint

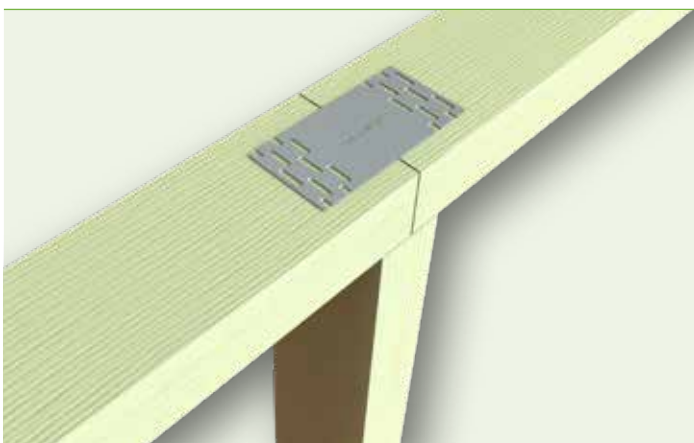

Bottom Plate Butt Joint

